


**NOVOHALL
Rotary Sensor
Touchless**

**RFC-4800
CAN SAE J1939
Mobile Applications**



Preliminary Data sheet

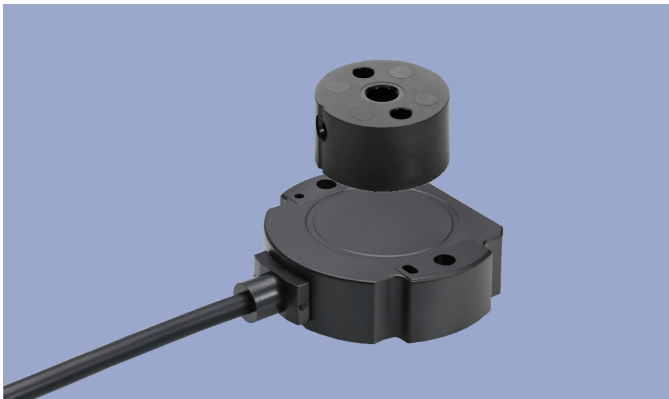

Special Features

- Touchless hall technology
- Electrical range 360°
- 2-part, mechanically decoupled
- High protection class, IP67, IP69
- Resolution 14 bit
- Wear-free
- Temperature range -40 °C to +105 °C
- Single and multi-channel versions
- Optimized for use in mobile applications with highest EMC requirements such as ISO pulses and high interferences to ISO 11452
- Other configurations see separate data sheets

Applications

- Mobile working machines (industrial trucks, construction machinery, agricultural and forestry machinery)
- Marine applications

The two-part design consisting of sensor and magnetic position marker offers great flexibility when mounting. The absence of shaft and bearing makes the assembly much less sensitive to axial and radial application tolerances - separate couplings are obsolete. Measurements can be made transmissively through any non-ferromagnetic material. The sensor is perfectly suitable for use in harsh environmental conditions through the completely encapsulated electronics.

Description	
Material	Housing: high grade, temperature resistant plastic
Mounting	With 2 lens flange head screws M4 (included in delivery)
Fastening torque of mounting	250 Ncm
Electrical connection	Cable 2x 2x 0.34 mm ² (AWG 22), TPE, shielded / Connector M12x1, A-coded with cable L = 0.15 m / Cable 4x 2x 0.25 mm ² (AWG 24), TPE, shielded

Mechanical Data	
Dimensions	see dimension drawing

Ordering Specifications

Ordering specifications

- Preferred types printed in bold

• Delivery time up to 25 pcs. within 10 working days EXW

• Best low-volume pricing

Interface
J: CAN SAE J1939

- Interface parameters

1: 1x position, 1x speed, 1x revolution counter

2: 2x position, 2x speed

3: 2x position, 1x revolution counter

5: 1x position, 1x speed, 1x revolution counter with bus termination 120 Ω

6: 2x position, 2x speed with bus termination 120 Ω

7: 2x position, 1x revolution counter with bus termination 120 Ω

- Baudrate

3: 500 kBaud

4: 250 kBaud

- Electrical connection

231: Cable, 4-pole, shielded, L = 0.5 m

232: Cable, 4-pole, shielded, L = 1 m

236: Cable, 4-pole, shielded, L = 3 m

240: Cable, 4-pole, shielded, L = 5 m

432: Cable, 8-pole, shielded, L = 1 m (CAN in/out)



511: Conector M12x1, 5-pin, with cable, shielded, L = 0.15 m

Cable versions and assembled connectors on request

R	F	C	-	4	8	5	2	-	2	1	4	-	J	1	4	-	2	3	2
Series			Mechanical version						Resolution			Interface							
			4851: Elongated hole mounting						14: 14 bits			2: Digital Interface							
			4852: Round hole mounting																

Drawing

CAD data see
www.novotechnik.de/en/download/cad-data/

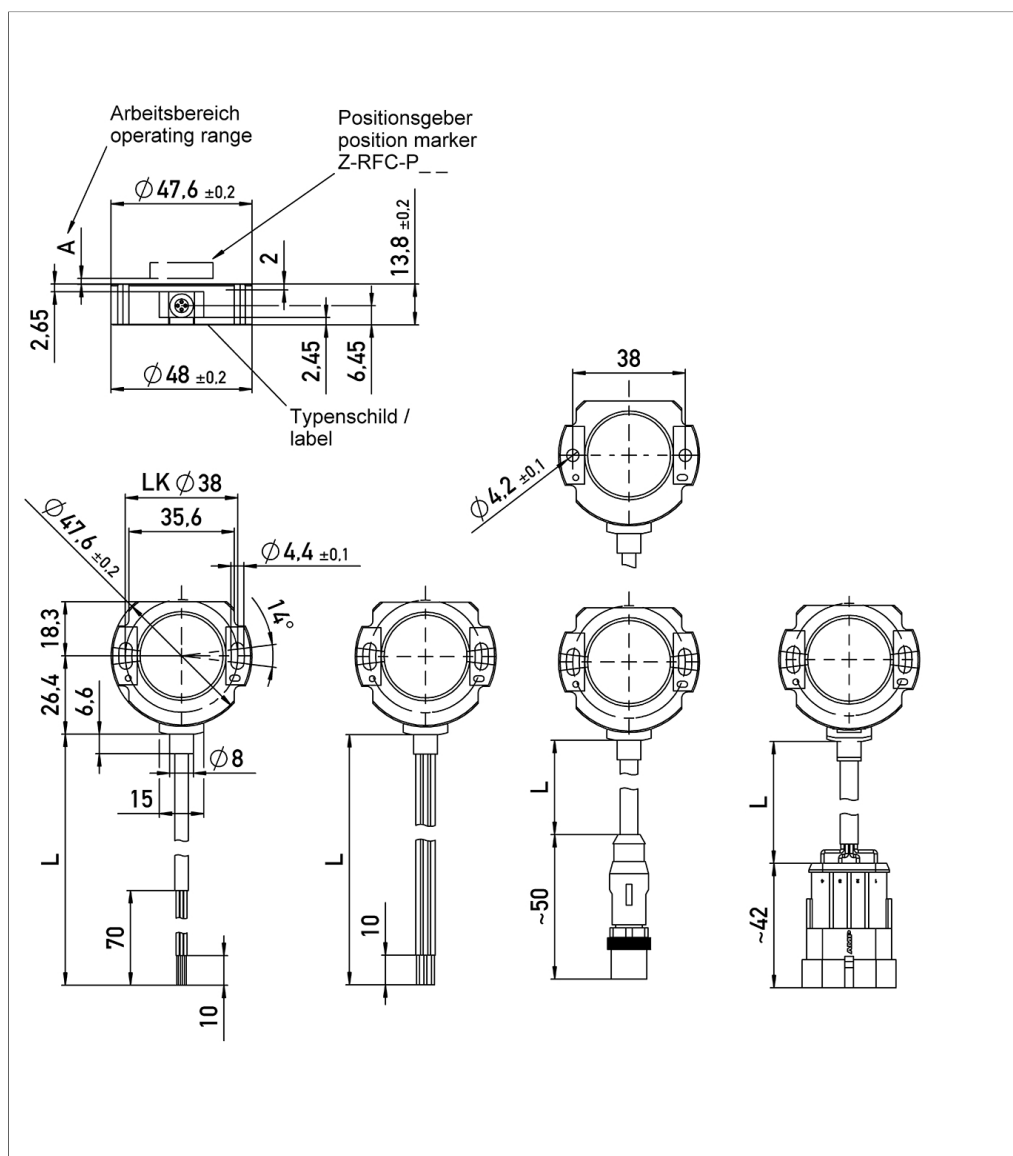


When the marking of the
position marker is pointing
towards the cable, the
sensor output is near the
electrical center position.

Technical Data

Type	RFC-48 _-214-J _- _- _-
Measured variables	Position, speed, revolution counter
Measuring range	360°
Measuring range speed	0 ... 750 rpm
Number of channels	1 / 2
Output signal / Protocol	CAN SAE J1939
Programmable parameters	Offset position, counting direction, averaging, baud rate, transmit mode, transmit cycle, node address
Diagnosis	activated (in case of error output signal is outside of the plausible signal range)
Node Address	129 ... 247 (dynamic address claiming)
Baud rate	250, 500 kBaud (default 250 kBaud)
Update rate	1 kHz
Resolution position (across 360°)	14 bit
Resolution speed	$360^\circ/2^{14} \approx 0.022^\circ/\text{ms}$
Independent linearity	$\leq \pm 0.5\% \text{FS}$
Repeatability	$\leq \pm 0.36^\circ$
Hysteresis	$\leq \pm 0.36^\circ$
Temperature error	$\pm 0.2\% \text{FS}$
Supply voltage Ub	12/24 VDC (8 ... 34 VDC)
Current consumption w/o load	$\leq 100 \text{ mA}$
Overvoltage protection	45 VDC (permanent)
Polarity protection	yes (supply lines)
Short circuit protection	yes (all outputs vs. GND and supply voltage up to 40 VDC)
Insulation resistance (500 VDC)	$\geq 10 \text{ M}\Omega$
Bus termination internal	120 Ω (optionally)
Environmental Data	
Max. operational speed	Mechanically unlimited
Vibration IEC 60068-2-6	20 g, 5 ... 2000 Hz, Amax = 0.75 mm
Shock IEC 60068-2-27	50 g, 6 ms
Protection class DIN EN 60529	IP67 / IP68 / IP69, IP67 (connector M12)
Operating temperature	-40 ... +105°C, -25 ... +85°C (connector M12)
Life	Mechanically unlimited
Functional safety	If you need assistance in using our products in safety-related systems, please contact us
MTTF (ISO 13849-1 parts count method, w/o load, wc)	61 years (one-channel) or 58 years (two-channel)
EMC Compatibility	
ISO 10605 ESD (Handling/Component)	8 kV
ISO 11452-2 Radiated HF-fields	100 V/m
ISO 11452-5 Radiated HF-Fields, stripline	200 V/m
CISPR 25 Radiated emission	Level 3
ISO 7637-2 Pulses on supply lines	(1, 2a, 2b, 3a, 3b, 4, 5) Level 4
ISO 7637-3 Pulses on output lines	Level 4

Connection Assignment

Signal	Cable code 2_ _	Connector code 5_ _	Cable code 4_ _
CAN_SHLD	Shield	Pin 1	Shield
Supply voltage Ub	WH	Pin 2	WH, RD
GND	BN	Pin 3	BN, BU
CAN_H	YE	Pin 4	YE, PK
CAN_L	GN	Pin 5	GN, GY
Connect cable shielding to GND			



Position Markers

Z-RFC-P02

Position marker for frontal fixation with 2 cylinder head screws M4x20 (with microencapsulation) or with locking pin (both included in delivery).

Material PF
Max. permitted radial offset ± 3 mm

P/N	Pack. unit [pcs]
40005661	1
400056080	25

Z-RFC-P08

Position marker for fixation with threaded pin M5 (included in delivery).

Material PF
Max. permitted radial offset ± 3 mm

P/N	Pack. unit [pcs]
400056070	1
400056084	25

Z-RFC-P30

Position marker for frontal fixation with 2 cylinder screws M3x8 (included in delivery)

Material PBT-GF
Max. permitted radial offset ± 1.5 mm





P/N	Pack. unit [pcs]
400056086	1
400056087	25

Z-RFC-P41

Position marker for frontal fixation with 2 cylinder head screws M4x20 (with microencapsulation) or with locking pin (both included in delivery).

Material PF
Max. permitted radial offset ± 3 mm

P/N	Pack. unit [pcs]
400105037	1
400105038	25

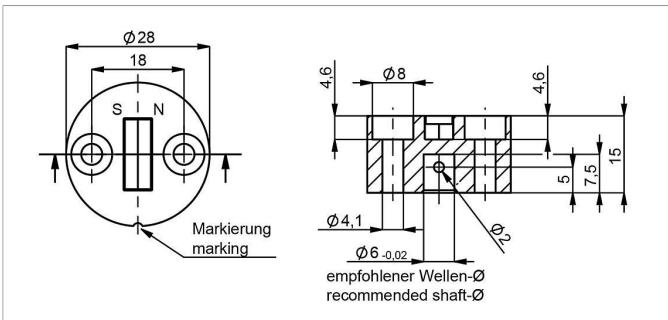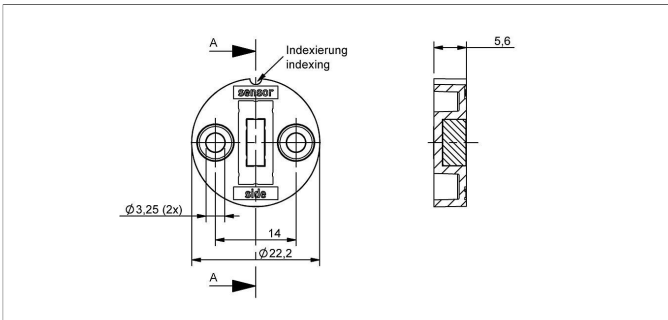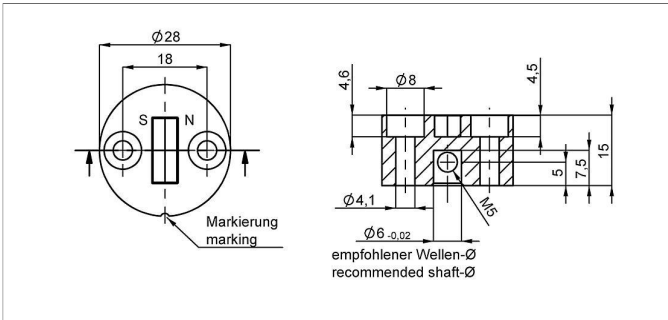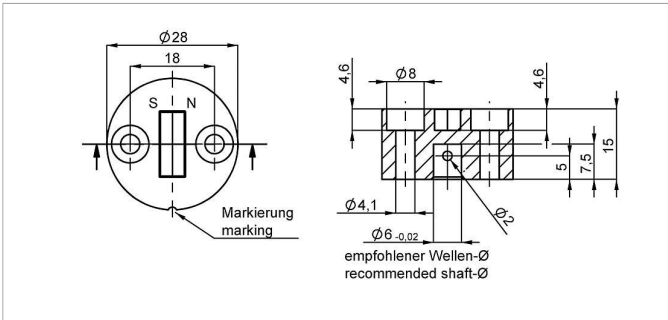

Position Markers

Z-RFC-P47

Position marker for frontal fixation with 2 cylinder head screws M4x20 (with microencapsulation) or with threaded pin M5 (both included in delivery).

Material PF
Max. permitted radial offset ± 3 mm

P/N	Pack. unit [pcs]
400105039	1
400105040	25

Z-RFC-P23

Position marker for fixation with threaded pin M4 (included in delivery)

Material PA6-GF
Max. permitted radial offset ± 3 mm

P/N	Pack. unit [pcs]
400056074	1
400056085	25

Z-RFC-P43

Position marker for fixation with threaded pin M4 (included in delivery)

Material PA6-GF
Max. permitted radial offset ± 3 mm





P/N	Pack. unit [pcs]
400105041	1
400105042	25

Z-RFC-P18

Screw position marker M10 x 25 mm, similar DIN 933, magnet potted

Material Aluminium, anodized
Max. permitted radial offset ± 3 mm

P/N	Pack. unit [pcs]
400104756	1
400104757	25

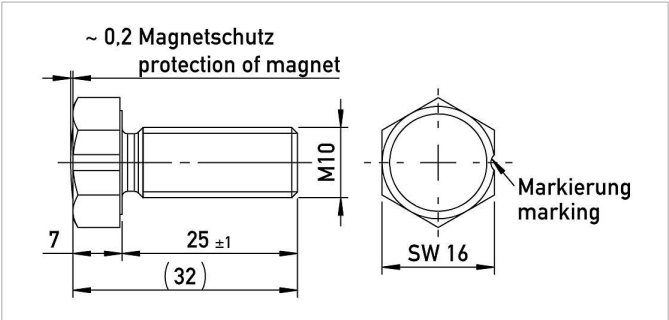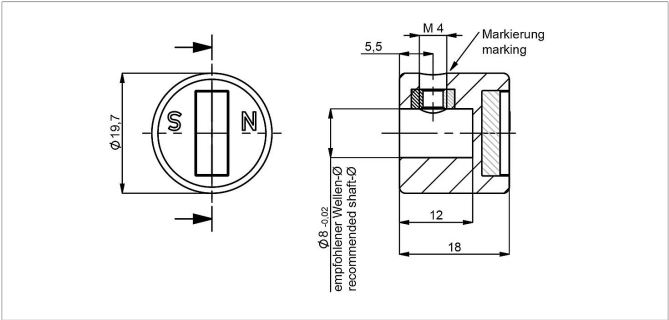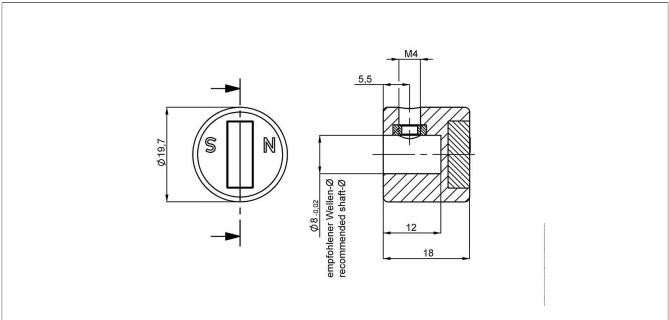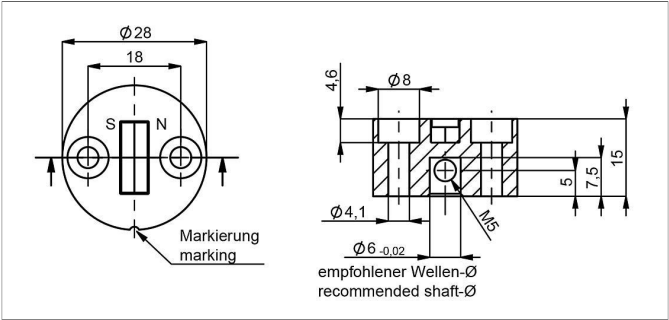

Position Markers

Z-RFC-P19

Screw position marker M8 x 25 mm, similar
DIN 933/ISO 4017, magnet potted
Material Aluminium, anodized
Max. permitted radial offset ± 3 mm

P/N	Pack. unit [pcs]
400104754	1
400104755	25

Z-RFC-P20

Screw position marker M10 x 25 mm, similar
DIN 933
Material Aluminium, anodized
Max. permitted radial offset ± 3 mm

P/N	Pack. unit [pcs]
400104758	1
400104759	25

Z-RFC-P03





Magnet for direct application onto customer's shaft (see user manual).
We recommend mounting on non-magnetizable materials, otherwise the specified working distances will vary (e.g. reduction of approx. 20% with axial mounting on a magnetizable shaft).
Max. permitted radial offset ± 1.5 mm

P/N	Pack. unit [pcs]
400005658	1
400056081	50



Z-RFC-P04

Magnet for direct application onto customer's shaft (see user manual).
We recommend mounting on non-magnetizable materials, otherwise the specified working distances will vary (e.g. reduction of approx. 20% with axial mounting on a magnetizable shaft).
Max. permitted radial offset ± 3 mm

P/N	Pack. unit [pcs]
400005659	1
400056082	50

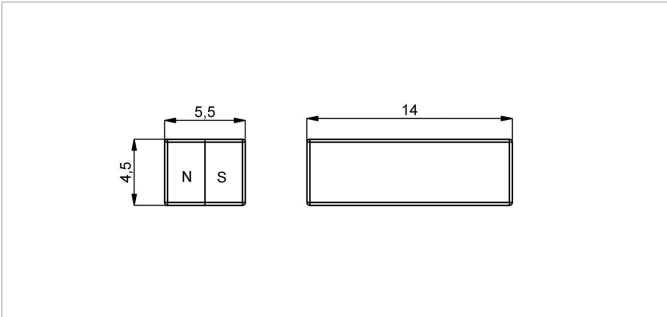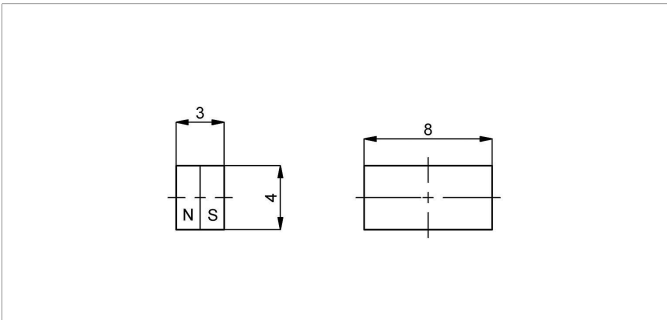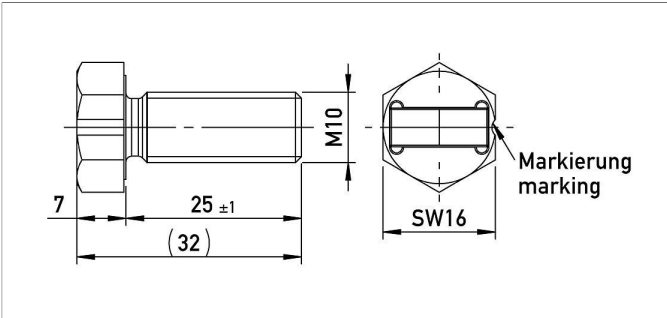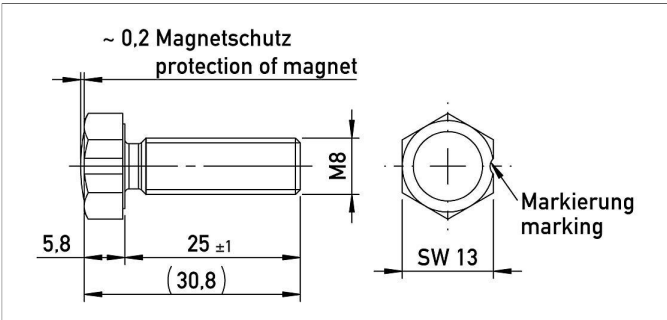

Position Markers

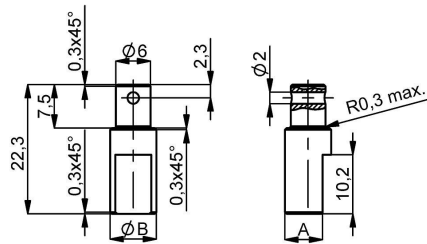

Z-RFC-S01/S02/S03

Shaft adapter for fixation at position marker Z-
RFC-P02/P41 with locking pin

Material	Stainless steel 1.4305
----------	------------------------

P/N	Type	ØB / A [mm]
400056206	Z-RFC-S01	6 / 4.5
400056207	Z-RFC-S02	8 / 6.5
400056208	Z-RFC-S03	10 / 8.5

Position Markers


Working Distances Position Markers [mm] - One-channel Versions

Z-RFC-P02 Z-RFC-P08	Z-RFC-P03	Z-RFC-P04	Z-RFC-P18	Z-RFC-P19	Z-RFC-P20	Z-RFC-P23	Z-RFC-P30	Z-RFC-P41 Z-RFC-P47	Z-RFC-P43
2.3 ... 5	0.7 ... 2.2	2.3 ... 5	0 ... 4.5	0 ... 2.2	2.3 ... 5	2.3 ... 5	0.7 ... 2.2	0 ... 2.7	0 ... 2.7

Working Distances Position Markers [mm] - Redundant Versions

Z-RFC-P02 Z-RFC-P08	Z-RFC-P03	Z-RFC-P04	Z-RFC-P18	Z-RFC-P19	Z-RFC-P20	Z-RFC-P23	Z-RFC-P30	Z-RFC-P43	Z-RFC-P41 Z-RFC-P47
1.9 ... 4.5	0.3... 1.8	1.9 ... 4.5	0 ... 4	0 ... 1.7	1.9 ... 4.5	1.9 ... 4.5	0.3 ... 1.8	0 ... 2.3	0 ... 2.3

Lateral Magnet Offset



Lateral magnet offset will cause additional linearity error. The angle error, which is caused by radial displacement of sensor and position marker depends on the used position marker or magnet.



Additional Linearity Error at Radial Displacement - One-channel Versions

Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18	Z-RFC-P19
0.5 mm: $\pm 0.4^\circ$	0.5 mm: $\pm 0.4^\circ$	0.5 mm: $\pm 1.4^\circ$	0.5 mm: $\pm 0.7^\circ$	0.5 mm: $\pm 1.3^\circ$
1.0 mm: $\pm 1.1^\circ$	1.0 mm: $\pm 1.1^\circ$	1.0 mm: $\pm 3.7^\circ$	1.0 mm: $\pm 1.3^\circ$	1.0 mm: $\pm 2.6^\circ$
2.0 mm: $\pm 3.5^\circ$	2.0 mm: $\pm 3.5^\circ$	2.0 mm: -	2.0 mm: $\pm 3.3^\circ$	2.0 mm: -

Additional Linearity Error at Radial Displacement - Redundant Versions

Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18	Z-RFC-P19
0.5 mm: $\pm 0.7^\circ$	0.5 mm: $\pm 0.7^\circ$	0.5 mm: $\pm 2.5^\circ$	0.5 mm: $\pm 1.1^\circ$	0.5 mm: $\pm 2.3^\circ$
1.0 mm: $\pm 1.8^\circ$	1.0 mm: $\pm 1.8^\circ$	1.0 mm: $\pm 6.4^\circ$	1.0 mm: $\pm 2^\circ$	1.0 mm: $\pm 4.5^\circ$
2.0 mm: $\pm 5.2^\circ$	2.0 mm: $\pm 5.2^\circ$	2.0 mm: -	2.0 mm: $\pm 4.6^\circ$	2.0 mm: -



Connector system
M12



EEM-33-44
M12x1 Mating female/male connector, 5-pin, straight, A-coded, with molded cable, IP68, CAN-Bus

Plug housing PUR
Cable sheath PUR, Ø = 7.2 mm, -25 ... +85°C (fixed)

P/N	Type	Length
400056144	EEM-33-44	5 m





EEM-33-41/42/43
M12x1 Mating female connector, 5-pin, straight, A-coded, with molded cable, IP67, shielded, open ended, CAN-Bus

Plug housing PUR
Cable sheath PUR, Ø = 7.2 mm, -25 ... +85°C (fixed)



Lead wires PP, 2x0.25 mm²+2x0.34 mm²

P/N	Type	Length
400056141	EEM-33-41	2 m
400056142	EEM-33-42	5 m
400056143	EEM-33-43	10 m



EEM-33-73
M12x1 Mating female connector, 5-pin, straight, A-coded, with coupling nut, screw termination, IP67, shieldable, CAN bus



P/N	Type
400005645	EEM-33-73





EEM-33-75
M12x1 mating female connector, 5-pin, angled, A-coded, with coupling nut, screw termination, IP67, shieldable, CAN bus, turning and fixing of contact carrier in 90° positions possible.

P/N	Type
400005646	EEM-33-75

Connector system
M12



EEM-33-45	
M12x1 splitter / T-connector, 5-pin, A-coded, IP68, 1:1 connection, female - male - female, CAN-Bus	
Plug housing	PUR, -25 ... +85°C
P/N	Type
400056145	EEM-33-45



EEM-33-47	
M12x1 terminating resistor, 5-pin, A-coded, IP67, 120 Ω resistance, CAN-Bus	
Plug housing	PUR, -25 ... +85°C
P/N	Type
400056147	EEM-33-47

IP67

Protection class IP67 DIN EN 60529

IP68

Protection class IP68 DIN EN 60529

Very good Electromagnetic Compatibility (EMC) and shield systems

Very good resistance to oils, coolants and lubricants

C

Suited for applications in dragchains

UL

UL - approved

CAN-Bus

Connecting Options on request



M12 connector

- Customized lengths
- 3-, 4-, 6- and 8-pole versions
- Protection class IP68
- Ordering codes of standard versions see ordering specifications



Molex Mini Fit jr.

- Customized length and lead wires
- 3-, 4- and 6-pole versions
- On request



Tyco AMP Super Seal

- Pin- and bushing housing
- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request



Molex Mini Fit jr.

- Customized length and lead wires
- 3-, 4- and 6-pole versions
- On request



Deutsch DTM 04

- Pin- and bushing housing
- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request



ITT Cannon Sure Seal connector

- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request

Novotechnik
Messwertaufnehmer OHG
P.O.Box 4220
73745 Ostfildern (Ruit)
Horbstrasse 12
73760 Ostfildern (Ruit)
Phone +49 711 4489-0
Fax +49 711 4489-118
info@novotechnik.de
www.novotechnik.de



© May 2, 2019