
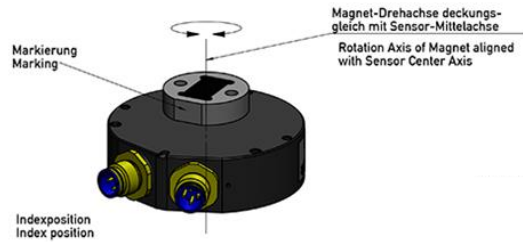


Author: VM / Martina Merkle

New Position Marker Z-RFC-P22 for touchless Rotary Sensors

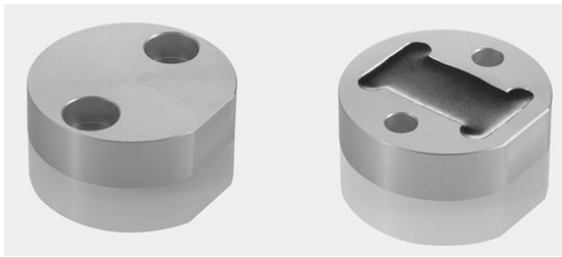


1 Introduction

To realize very large working distances, the new position marker Z-RFC-P22 is now available for non-contacting rotary sensors (product series RFC-4800 Gen.3 (only models RFC-485x without internal shielding, analog and CAN), RFD-4000, RFX-6900 and RFC-3200).

2 Technical Features

- Working distances (depending on series and interface) up to 10.9 mm
- Aluminium
- Frontal fixation with 2 screws M4 (included in delivery)
- Magnet encapsulated
- Temperature range -40 ... +125°C
- Please note: the side without potting material faces to the active side of sensor

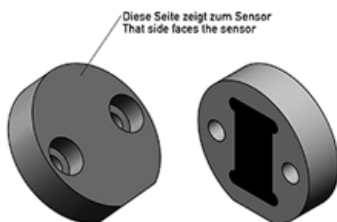

3 Online verfügbare Informationen

The data sheet and the operating manual are available as usual on our homepage.

4 Prices

Sales prices are already included in price list NT_IL_AL_2001.

5 Anttachments

https://www.novotechnik.de/fileadmin/user_upload/Positionmarker_rotary_e.pdf